
# **BALLISTIC DOORS AND FRAMES RATED TO UL 752 LEVEL 3**

USA-MADE

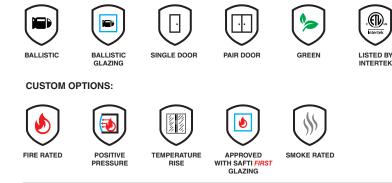

## **PRODUCT ADVANTAGES**

- Meets UL 752 Level 1, 2 and 3 for use in single door or pairs.
- Can be used with any listed ballistic glazing in compliance with UL 752 Level 1, 2 or 3.
- Standard door profiles include 6 in. door stile, 6 in. door top rail and 2 in. door frame. Narrow door profiles include 3-¾ in. door stile, 3-¾ in. door top rail and 1-1/8 in. door frame. Both the standard and narrow door profile options include a 10 in. ADA-compliant bottom rail, which can be modified with AHJ approval.
- Depending on glazing selection, door thickness ranges from 1-<sup>3</sup>/<sub>4</sub> in. to 3 in.
- > For interior or exterior applications.
- Listed and labeled by Intertek.
- USA-manufactured for fast lead times and competitive pricing.
- 5 year manufacturer's warranty.

#### **HARDWARE OPTIONS**

**Titan Metal Products** offers standard hardware packages and can accommodate most specialty hardware options.

### **UL 752 BALLISTIC RATING**

- Level 1 = 9 mm Full Metal Copper Jacket with Lead Core
- Level 2 = .357 Magnum Jacketed Lead Soft Point
- Level 3 = .44 Magnum Lead Semi-Wadcutter Gas Checked



### **APPROVALS**

UL 752, UL 1784, HMMA 860, HMMA 861, HMMA 862, HMMA 866



# **BALLISTIC DOORS AND FRAMES RATED TO UL 752 LEVEL 3**


## **TYPICAL DETAILS**

Safety Professionals

MEMBER

itan Metal Products

USA

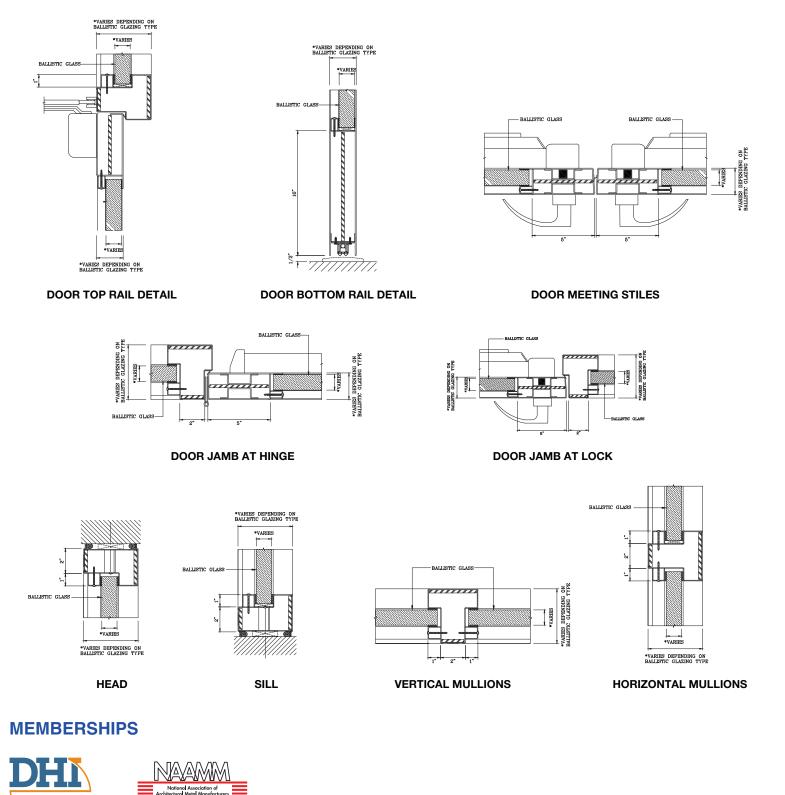

© Titan Metal Products. February 2021